

□ Roadway Round/ Smaller Wattage

Features:


- High-pressure die cast aluminum frame and stretched aluminum housing with powder coating finish.
- High purity aluminum reflector with vacuum coated inner surface.
- Heat-resistant polycarbonate or tempered glass lens.
- Heat-resistant gas-tight silicone rubber seal.
- Timer dimming function available upon request.

Lamp and Ballast:

- Miller's 55W ball type or 40-80W round tubular induction lamp features high lighting efficacy, long lifetime, good color rendering, stable output, etc.
- Miller's electronic ballast features high power factor (>0.95), flickering free, low loss, constant output, etc.


Applications:

- Freeway, highway, parking lots, public entrances, off-street areas.

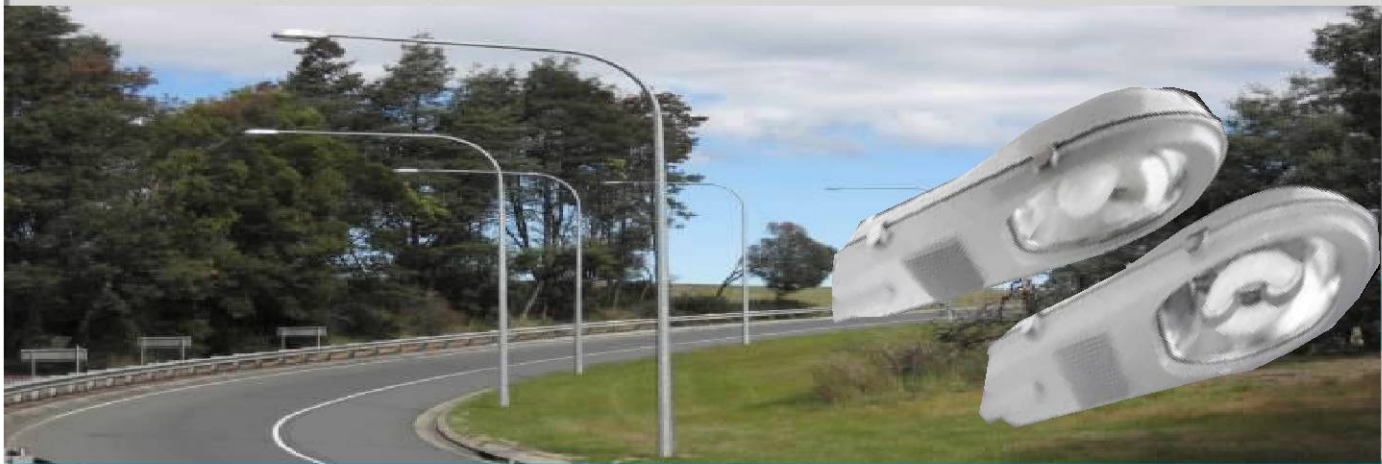

Dimensions:

Unit:in.(mm)

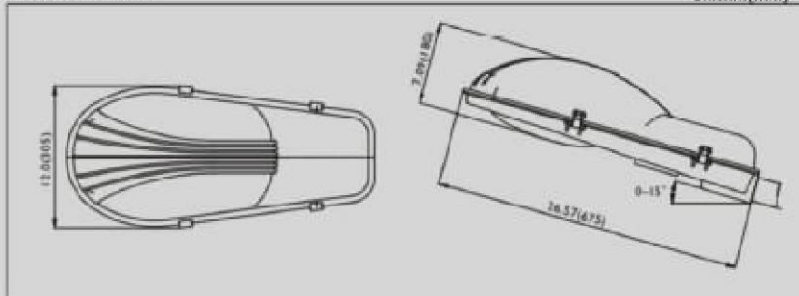

Fixture Specifications:

Product No.	Fixture Model No.	Lamp	Wattage (W)	Voltage (V)	Color Temperature (K)	Ambient Temperature (°C)	Installation
RL55A	RL55-RND		55	120~277	5000	-20°C~+40°C	Round Pole Φ50
RL40C	RL40-RND		40				
RL70C	RL70-RND		70				
RL80C	RL80-RND		80				