


SWITCHES, DIMMERS, & PLUGS

- | | |
|---|---|
| <p>A. Rotary Turn (single circuit) 6A-125V AC 3/8" shank
L577-3N -nickel L577-3B-brass
5/8" shank
L577-5N -nickel L577-5B-brass
1-1/16" shaft
L577-5B-brass</p> <p>B. Toggle (single circuit) 6A-125V AC
L720-T -nickel</p> <p>C. Pushbutton (single circuit) 3A-125V AC
L679-B -brass L679-N -nickel</p> <p>D. Rotary Turn (2 circuit, 4 position) 6A-125V AC Off, L-1, L-2, L-1-2
3/8" shank
L663-20B brass L663-20N -nickel</p> <p>E. Fluorescent Starter push button
40W 125V AC
L388 -nickel</p> <p>F. Pull Chain 2-circuit LO-MED-HI-Off
6A 125V AC
E460 -2-circuit</p> <p>G. Rotary (single circuit) bushing mounted 3A-125V AC
L574T25W -white L574T25BL -black</p> <p>H. Pull Chain (single circuit) 3A-125V AC
L10097-8B -brass L10097-8N -nickel</p> <p>I. Pull Chain (3 circuit, 4 position) push-in terminals for #18 wire 6A-125V AC 3 Circuit OFF, L-1, L-2, L-3
L1691 -brass</p> <p>J. Pull Chain (2 circuit, 4 position) 6A-125V AC 1/4 HP-125/250V AC heavy duty push-in terminals 2 Circuit Off L-1, L-2, L-1-2
L1689 -nickel</p> <p>K. Feed-thru Cord Switch 6A-125V AC use with SPT-1
L413W -white
L413B -brown
L413BLK -black
L413I -ivory
wire use with SPT-2 wire
L423W -white
L423B -brown
L423BL -black</p> <p>L. Feed-thru Cord Switch heavy duty single pole flat or round cords 15A @ 120V ac
L5410 I -ivory
L5410 -brown</p> <p>M. SPT-2 In Line Switch 6A -120V AC
L412B -brown L412G -gold
L412C -clear L412BL -black
L412WH -white</p> <p>N. Triple Tap 15A-125V
L697-I -ivory
L697-I -brown</p> <p>O. Appliance Switch 15A 125VAC
MZE215 -on/off</p> | <p>P. D555UNB-(black) Foot on/off Switch (unassembled) parts packed separately 3A/360W-120V AC</p> <p>Q. Snap-In Convenience Outlet 15A-125V 2 pole, 3 wire grounding
L1374BL -black
L1373W -white</p> <p>R. Academy Easy Install Plugs 15A-125V Use with 18/2 SPT-1 Wire
Non-Polarized
L779 -brown
L780 -white
L781-black
Polarized
L782 -brown
L783 -white
L807 -black</p> <p>S. L113 -Rubber Plug Wire Sizes 18-14 Black Only 15A-125V</p> <p>T. Attachment Plug 15A-125V Use with 18/2 SPT-1 Wire Polarized
L763 -brown
L765 -white
Use with 18/2 SPT-2 wire Polarized
L763-2 -brown
L765-2 -white</p> <p>U. Kwik Wire Pin Type 10A-125V Polarized
L123PB -brown
L123PI -ivory
L123PE -black
L123PW -white</p> <p>V. Attachment Outlet Polarized 15A-125V use SPT-1 wire
L760 -brown
L761 -ivory
L762 -white
use SPT-2 wire
L760-2 -brown
L762-2 -white</p> <p>W. L274 -Grounding Adapter 15A-125V</p> <p>X. Premium Industrial Specification Grade accepts up to #10 AWG conductors 2 pole, 3 wire grounding color black.
L5266N -15A-125V</p> <p>X1. L5269N -15A-125V</p> <p>Y. E1008 -Socket Flasher Button Medium Sockets Only Flash Rate 65-85 per minute 60W 120V</p> <p>Z. Super Plug use with SPT-2, 18 or 16 ga. wire 15A-125V Polarized
L790 -white
L791 -brown
Non-Polarized
L790W -white
L791B -brown</p> <p>AA. Add-A-Outlet 10A-125V Polarized
L808 -brown
L809 -white</p> <p>BB. L125 Outlet Adapter 660W-125V</p> <p>CC. Outlet Adapter 660W 125V
L61B -brown
L61-I -ivory</p> |
|---|---|



USA & CANADA
1-800-445-6611
FAX WATS 1-800-445-6690

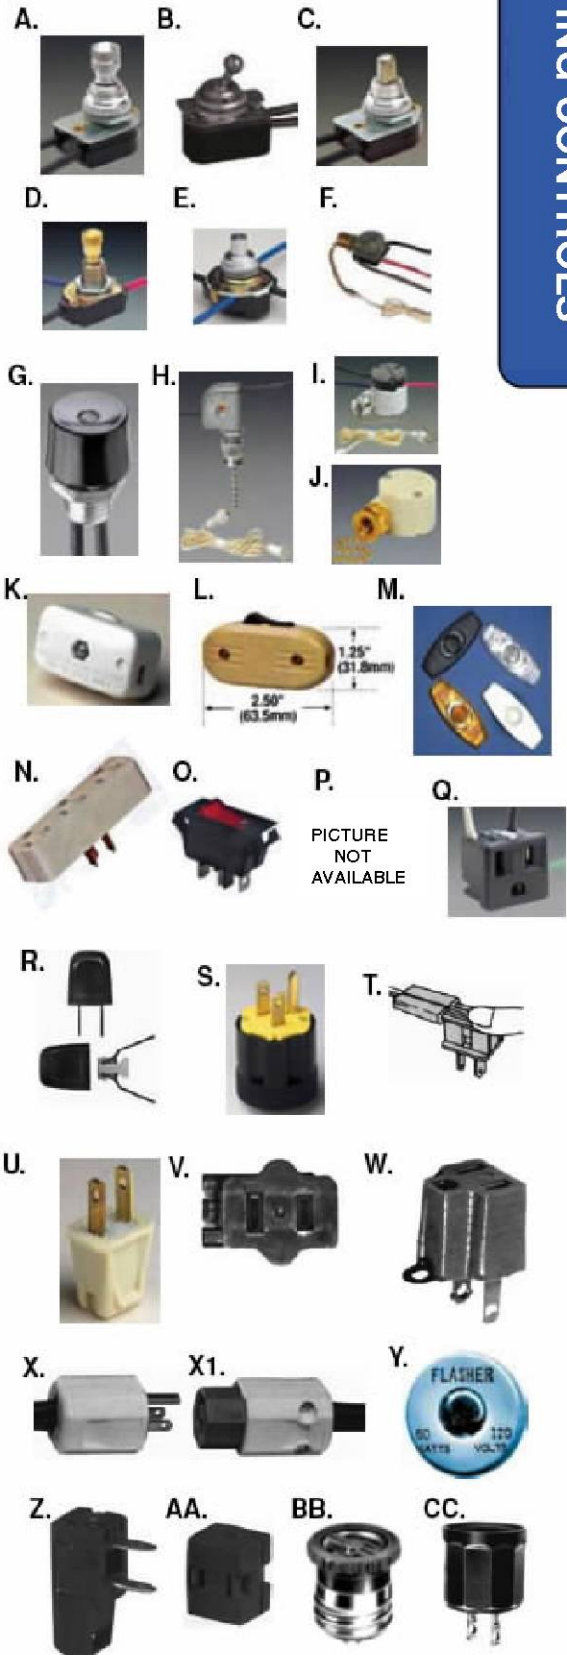

www.MillerLightingProducts.com

PHOENIX, AZ
Phone: 602-268-0001
Fax: 602-268-0130

customerservice@millerlightingproducts.com 5